

TECHNICAL SPECIFICATION

VIDEO	
Format	DVI-D
Maximum Pixel Clock	165 MHz
Input Interface (TX)	(2) DVI-D 29-pin female
Output interface (RX)	(2) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @ 60Hz AND Up to 4K/2K (3840x2160) @ 30Hz
DDC	5 volts p-p (TTL)
Input equalization	Automatic
Input cable length	Up to 20 ft
Output cable length	Up to 20 ft
USB	
Input interface (TX)	(1) USB Type B (Female)
Output interface (RX)	(2) USB Type A (Female)
Signal Type	OHCI/VHCI (USB 1.1)
RS-232	
Input Interface (TX)	(2) DB9 (Female)
Output Interface (RX)	(2) DB9 (Female)
Speed	@ 115 Kbps
IR	
Input Interface (TX)	(1) 3.5 mm (Female)
Output Interface (RX)	(1) 3.5 mm (Female)
Frequency Response	30KHz to 80KHz
OTHER	
Power	External 100-240 VAC/5VDC4A
Dimensions	5.125 in W x 1 in H x 3.625 in D
Weight	1 lb (.5 lbs per unit)
Operating Temp.	0-55 °C (32-131 °F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

WHAT'S IN THE BOX

PART NO.	Q-TY	DESCRIPTION
LDX-2P-TX	1	Dual DVI-D, USB 1.1, Dual RS232, Audio over CAT5/5e/6 Transmitter
LDX-2P-RX	1	Dual DVI-D, USB 1.1, Dual RS232, Audio over CAT5/5e/6 Receiver
PS5VDC4A	2	PS5VD4A Power Supply
Quick Start Guide	1	

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose. SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.



Smart-AVI
SMART AUDIO VIDEO INNOVATION

LDX-2P

**Dual Head DVI-D, USB
Keyboard, Mouse
and Audio Extender**



**EXTEND DUAL DVI-D,
DUAL RS-232, USB AND AUDIO
UP TO 245 FEET OVER TWO
CAT5E/6 CABLES**

800.AVI.2131, 702.800.0005
2455 W Cheyenne Ave, Suite 112
North Las Vegas, NV 89032

SmartAVI.com

Quick Start Guide

OVERVIEW


Using HDBaseT technology, the LDX-2P DVI extender is capable of sending dual DVI-D signals up to 245 feet over two conventional and inexpensive CAT5e/6 cables. HDBaseT technology is superior to older DVI extenders that require a special Cat6 shielded cable to go a short distance. The LDX-2P also has USB keyboard and mouse, audio and RS-232 extension, giving users the ability to control displays or devices remotely.

FEATURES


- Extends dual DVI-D up to 245 feet from the source
- HDCP Support
- Supports up to 1920x1200 digital video resolution @ 60 Hz
- Supports 4K/2K (3840x2160) video resolution @ 30 Hz
- Automatic DDC Learning
- USB Keyboard and Mouse extension
- Uncompressed Video using HDBaseT
- RS-232 extension allows for remote control of displays
- External power adapter for transmitter and receiver unit
- Supports Stereo Sound
- Compatible with Windows, Mac and Linux Operating Systems

HARDWARE INSTALLATION


1. Power off all devices.
2. Connect two DVI-D sources (computer) to the two DVI-D ports on the back of the transmitter.
3. Connect a USB source (computer) to the USB port on the transmitter.
4. Optionally connect RS232 for control functions.
5. Connect the transmitter to the receiver with two CAT5 UTP (Unshielded Twisted Pair) cables.
6. Connect a DVI-D compatible display to each of the two DVI-D ports on the back of the receiver.
7. Connect USB keyboard and mouse to the USB ports on the receiver.
8. Optionally connect RS232 for control functions.
9. Connect the power to the receiver and the transmitter.
10. Power on the display and then the computer.

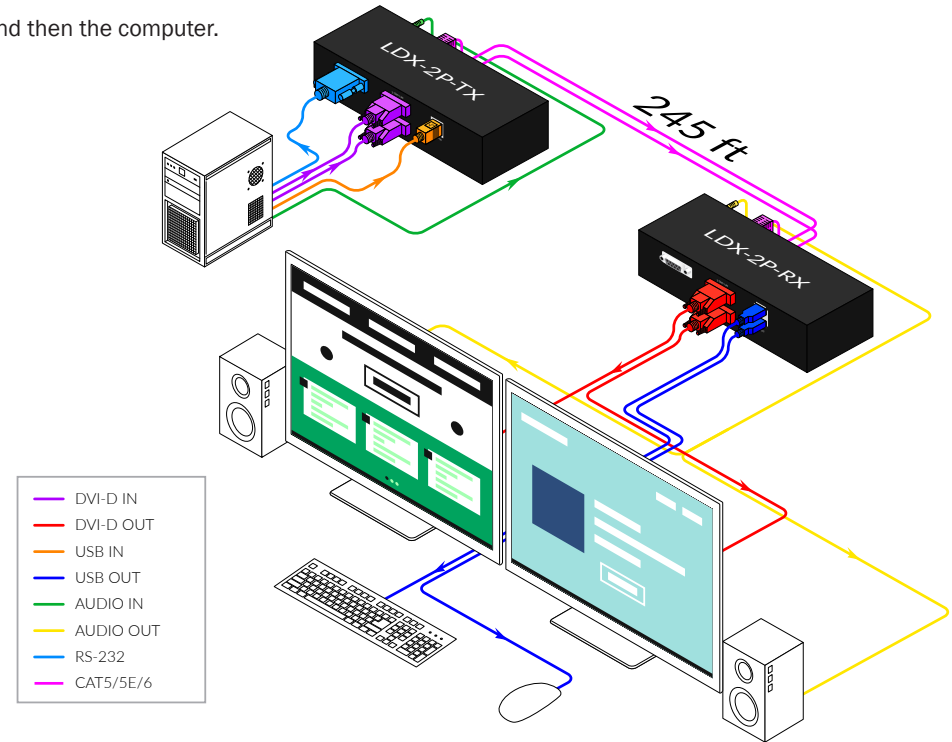

LDX-2P-TX FRONT

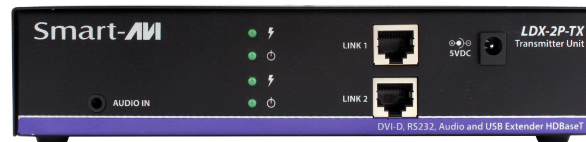

LDX-2P-RX FRONT

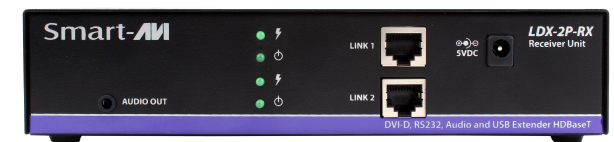

LDX-2P-TX BACK



LDX-2P-RX BACK

