

TECHNICAL SPECIFICATION

VIDEO	
Format	HDMI 1.3 and HDCP compliant
HDTV Resolutions	480p, 720p, 1080i, 1080p/60Hz/48bit
TV Resolution	480i
Input Interface (TX)	HDMI Type A 19-pin Female TMDS
Output Interface (RX)	HDMI Type A 19-pin Female TMDS
Input Cable Length	Up to 40 ft
Output Cable Length	Up to 40 ft
AUDIO	
Format	Dolby TrueHD, DTS-HD MA
Input Interface	HDMI (Integrated)
Output Interface	HDMI (Integrated)
IR	
Signal Type	38 KHz
Interface	3.5 mm Jack Socket (Female)
SYSTEM	
Interface	RJ-45
Cable Requirements	CAT5/5e/6
Maximum Length	500 f
OTHER	
Power	External 100-240 VAC/5VDC2A @10W
Dimensions	2.78" W x 1.125" H x 4" D
Weight	0.45 lbs
Approvals	UL, CE, ROHS Compliant
Operating Temp.	32-104 °F (0-40 °C)
Storage Temp.	-4-140 °F (-20-60 °C)
Humidity	Up to 85% (non-condensing)

WHAT'S IN THE BOX

PART NO.	Q-TY	DESCRIPTION
HLX-TX500	1	HDMI over LAN or CAT5e/6 Cable Transmitter
HLX-RX500	1	HDMI over LAN or CAT5e/6 Cable Receiver
Power Supply	2	PS5VD2A
Quick Start Guide	1	

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.



800.AVI.2131, 702.800.0005
2455 W Cheyenne Ave, Suite 112
North Las Vegas, NV 89032

SmartAVI.com

Smart-AVI
SMART AUDIO VIDEO INNOVATION

HLX-500

HDMI and IR Extender Over LAN



**BREAK DISTANCE BARRIERS
TO EXTEND HDMI AND
IR SIGNALS OVER IP
USING CAT5E/6 CABLES**

Quick Start Guide

OVERVIEW

The HLX-500 HDMI Extender gives users the freedom to extend HDMI signals via LAN, using inexpensive Cat5e/6 cables that many modern communications already rely on. This chainable extender can be used to generate thousands of feet of HDMI signal extension, breaking distance barriers. Users can set up their own extension cabling or utilize the pre-existing LAN infrastructure they have access to. Each unit extends signals up to 500 feet. With no software or driver required, users can easily extend HDMI signals such as HDTV, Blu-Ray, video game consoles and more. HLX-500 supports 1080p HD video up to 1920x1080 resolution at 60Hz and is Infrared Remote enabled.


The HLX-500 is a compact unit that is easily integrated into a digital display network at retail stores, restaurants, office spaces and many other venues. The transmitter and receiver units are small yet sturdy, which makes inclusion into any audio/video infrastructure quick and efficient. The HLX-500 compresses data to utilize Cat5e/6 cables, but users will see no degradation of signal when using one gigabit Internet connections and up. For users utilizing pre-existing LAN connections, implementing a one gigabit switch allows for full resolution extension. Users with smaller bandwidth will experience compressed signals, if they so choose.

FEATURES

- Extends HDMI signal up to 500 feet via LAN (Cat5e/6 cables)
- Chainable for thousands of feet of extension
- Supports high resolution 1080p HD video, 1920x1080 at 60Hz
- Supports stereo audio
- IR (Infrared) remote enabled
- Bracket mountable
- No software or driver required
- Plug-and-Play ready

HARDWARE INSTALLATION

1. Connect an HDMI cable from the HDMI source to the HLX-RX500.
2. Connect the HDMI display to the HLX-RX500.
3. Connect the HLX-TX500 to the HLX-RX500 with a CAT5e/6 cable.
4. Power on the HLX-TX500 and the HLX-RX500.

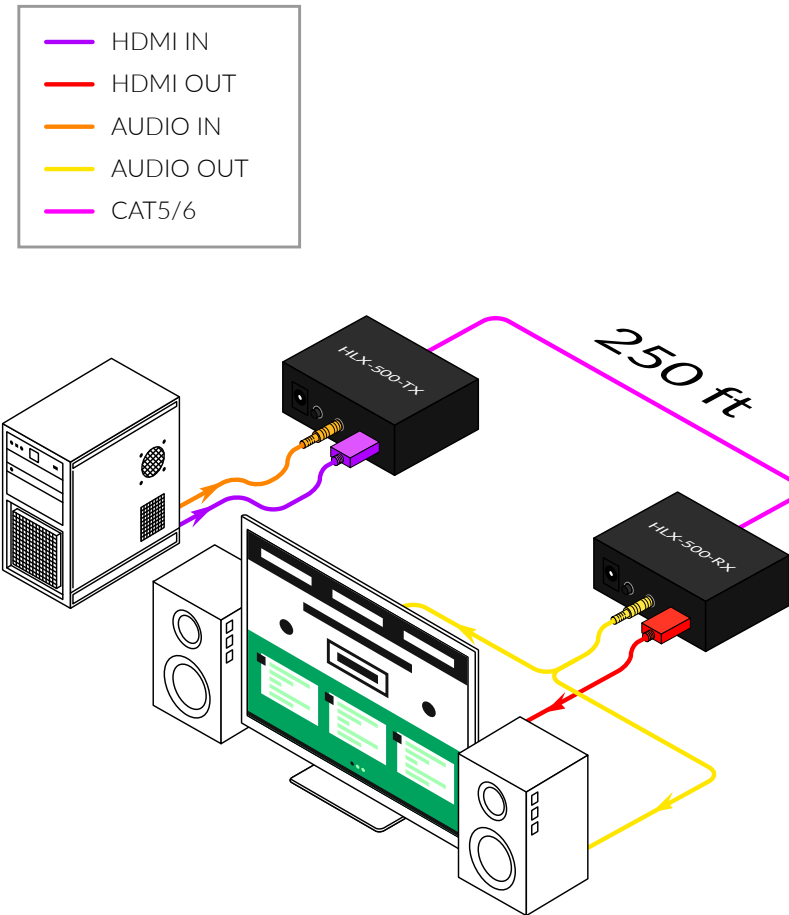

HLX-TX500 FRONT



HLX-TX500 BACK



HLX-RX500 FRONT



HLX-RX500 BACK