

2-Port HDMI signal switcher with front-panel buttons and LED status indicators.

FEATURES


- (2) HDMI inputs
- (I) HDMI output for HDTV support
- Supports 1080p/60Hz (1920x1080) resolution
- Simple front-panel button control
- Compact design for optimal installation
- Up to 10.2 Gbps ultra-high bandwidth
- LED status indicators

APPLICATIONS

- Retail signage
- Airport displays
- Control rooms
- Security monitors
- Video production
- Corporate communications
- Educational presentations
- Medical supervision
- ... and many more!

WHY SWITCH TO HR-4P?

HR-2P is a powerful 2-port HDMI signal switching solution designed for simple set-up and easy operation. Equipped with two HDMI inputs and one HDTV-ready output, HR-2P switches between source signals at the press of a button. HR-2P is compact and plug-and-play ready, so installing it into an existing AV set-up is always simple!

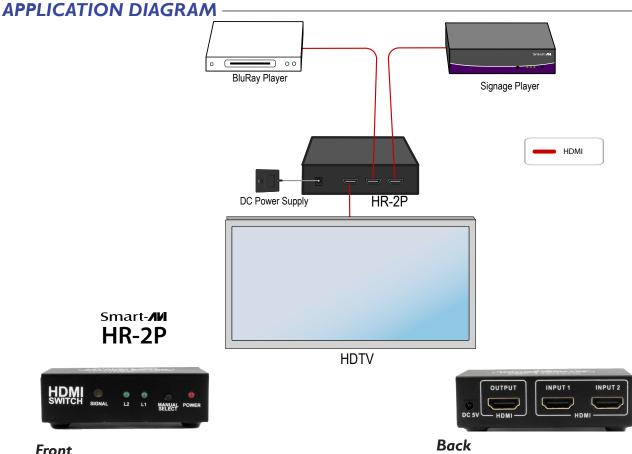

Front SPECIFICATIONS

| GENERAL | |
|-------------------|----------------------------------|
| Input | (2) HDMI 1.3 |
| Output | (1) HDMI 1.3 |
| Video Bandwidth | 2.25 Gbps |
| Video Resolution | Up to 1080p (1920x1200 @ 60Hz) |
| Max. Transmission | 50 ft. |
| CONTROL | |
| Front Panel | Tactile Switches (MANUAL SELECT) |

| OTHER | |
|-------------------|-----------------------------|
| Dimensions | 3.31" W x 0.94" H x 2.85" D |
| Weight | 0.64 lbs |
| Operating Temp. | -15° to 55°C(5° to 131°F) |
| Storage Temp. | -20° to 60°C(-4° to 140°F) |
| Relative Humidity | 20% - 90% (no condensation) |
| Power Consumption | 3.5 Watts |

SMART AUDIO VIDEO INNOVATION

| ORDERING INFORMATION | |
|----------------------|---------------------------------------------|
| Part No. | Description |
| HR-2P-S | 2x1 HDMI Switch. Includes:[HR-2P, PS5VDC1A] |

www.smartavi.com

Tel: 800.AVI.2131 • 818.503.6200 • 11651 Vanowen St. North Hollywood, CA. 91605