

## TECHNICAL SPECIFICATIONS

GENERAL	
Input	(2) HDMI 1.3
Output	(1) HDMI 1.3
Video Bandwidth	2.25 Gbps
Video Resolution	Up to 1080p (1920x1200 @ 60Hz)
Max. Transmission	50 feet

CONTROL	
Select Source	"MANUAL SELECT" button or IR remote

PHYSICAL	
Dimensions	3.31"W x 0.94"H x 2.85"D
Weight	0.25 lbs.
Operating Temp.	0° - 70° C
Storage Temp.	-20° - 60° C
Relative Humidity	20%-90% (no condensation)
Power Consumption	3.5 Watts

## WHAT'S IN THE BOX

PART NO.	QTY	DESCRIPTION
HR-2P	1	HDMI 2x1 Switch
PS5VDC1A	1	Power Supply / Adapter
Quick Start Guide	1	Installation Setup/Part listing

## NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.

**800.AVI.2131**

Tel: (818) 503-6200 | Fax: (818) 503-6208  
11651 Vanowen St. North Hollywood, CA 91605

**SmartAVI.com**

**Smart-AVI**  
SMART AUDIO VIDEO INNOVATION

**HR-2P**

**2-Port HDMI Switch with IR Support**



**Switch between two HDMI video sources on one display with front-panel or IR remote control.**

**Quick Start Guide**

HR-2P is a 2-to-1 HDMI signal switch with IR control support. Send two HDMI sources to one HDMI output display, and switch between both signals with the push of a button. HR-2P is also compatible with infrared remote control, so switching is always kept easy and within reach.

## FEATURES

- (2) HDMI Inputs for HD video and digital audio
- Infrared control support
- Easy switching with SELECT front panel button
- 1080p HD (1920x1080 @ 60Hz) resolution
- Simple set-up; plug-and-play ready
- LED status indicators
- OFF/ON switch for energy saving




## FRONT



## BACK

## INSTALLATION DIAGRAM

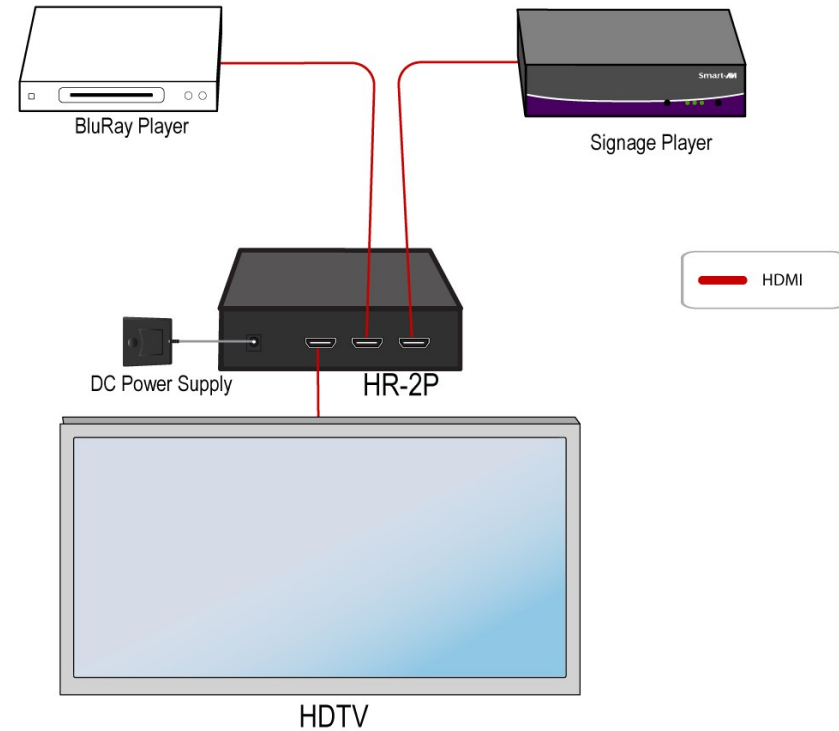

Smart-AM  
HR-2P

## CONNECTING THIS PRODUCT

1. Make sure all devices are turned OFF.
2. Connect HDMI source devices to HR-4P via HDMI cord (any Input 1 & 2).
3. Connect HR-2P to an HDTV or HDMI display device via HDMI cord (OUTPUT).
4. Connect HR-2P to PS5VDC1A power supply.
5. Turn on connected input-output devices.
6. Turn on HR-4P by switching the ON/OFF button to ON.

\*\*Status LEDs should display green when HDMI signals are properly connected\*\*