



# P2P-KHR300

Point-to-Point Single-Head HDMI CAT5 & Fiber Receiver with USB 2.0, Audio, and RS-232.

Extend, control, and manage your HDMI-based workstation over IP with the P2P-KHR300. Supporting flexible Direct, Matrix, and SaviGate modes, the P2P-KHR300 adapts to your installation needs — from simple point-to-point extensions to full multi-user managed environments — over CATx or Fiber.

## FEATURES



Supports HDMI video up to 4K @ 30Hz or 1080p @ 60Hz



Transparent USB 2.0 extension for peripherals



Analog audio and RS-232 passthrough



Selectable Direct, Matrix, and SaviGate modes via web interface



SaviGate Gateway support for centralized management (sold separately)



Up to 100m over CATx / 10km over fiber



Ultra-low latency JPEG2000 compression



Plug-and-play installation



EDID learning and management

## IDEAL USE CASES



AV and IT extension for secure environments



Digital signage and workspace centralization



Medical and industrial command centers



Military and government operations



Broadcast and production control rooms

# HOW IT WORKS

## Flexible KVM extension and switching

The P2P-KHR300 can operate in multiple modes depending on your application needs:



### Direct Mode

Simple point-to-point extension without configuration

**Supports:** 1 Transmitter / 1 Receiver



### Matrix Mode

OSD-based multi-user KVM switching across a network

**Supports:** Up to 64 Transmitters / 8 Receivers




### SaviGate Mode

Centralized management, access control, and advanced routing when integrated with a SaviGate controller

**Supports:** Up to 128 Transmitters / 16 Receivers

Modes are easily changed using a simple dropdown menu within the web browser interface of each unit.

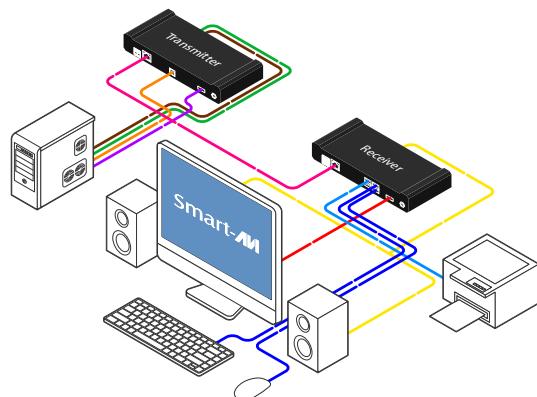

### COMPATIBLE TRANSMITTERS

Pairs with the following receiver models for point-to-point operation:

- **P2P-KVT300** - DVI Transmitter via CATx & Fiber
- **P2P-KHT300** - HDMI Transmitter via CATx & Fiber
- **P2P-KDT300** - DisplayPort Transmitter via CATx & Fiber

### SPECIFICATIONS

Video OUT		USB	
Format	HDMI 1.4 & HDCP 1.4 Compliant, Video Bandwidth Up To 10.2 Gbps	Out	4x USB Type A Ports, USB 2.0, USB 1.1, USB 1.0 compatible
Video Resolution	Up To 4K @ 30 Hz	KM	Keyboard & Mouse Emulation
Connector	1x HDMI (19-Pin Female)	Other	
System			Power
Interface	EDID Storage & Emulation		
Transmission Distance	CAT5: Up To 100m; LC Connector Fiber Multimode: Up to 500m; Fiber Single Mode: Up to 10km		
Compression	Ultra-Low Latency JPEG2000		
RS-232	Optional Pass-through up to 115200		
Management	Selectable Direct, Matrix, SaviGate Gateway support for centralized management (sold separately)		
Audio			
Format	PCM 2.0/2.1/5.1/7.1, Dolby Digital 5.1 ch, Dolby Digital Plus, Dolby TrueHD, DTS 5.1 ch		
In/Output Interface	3.5 mm Stereo Aux Socket (Female)		
ORDERING DETAILS			
P2P-KHR300-S	Point-to-point Dual-Head HDMI CAT5 & Fiber Receiver with USB 2.0, Audio and RS232. [P2P-KHR300, PS12VD3A]		