



P2P-KHR310

Point-to-Point Single-Head HDMI CAT5 & Fiber Receiver with USB 2.0, Audio, and RS-232.

Extend, control, and manage your HDMI-based workstation over IP with the P2P-KHR300. Supporting flexible Direct, Matrix, and SaviGate modes, the P2P-KHR300 adapts to your installation needs — from simple point-to-point extensions to full multi-user managed environments — over CATx or Fiber.

FEATURES



Supports HDMI video up to 4K @ 30Hz or 1080p @ 60Hz



Transparent USB 2.0 extension for peripherals



Analog audio and RS-232 passthrough



Selectable Direct, Matrix, and Savigate modes via web interface



Savigate Gateway support for centralized management (sold separately)



Up to 100m over CATx / 10km over fiber



Ultra-low latency JPEG2000 compression



Plug-and-play installation



EDID learning and management

IDEAL USE CASES



AV and IT extension for secure environments



Digital signage and workspace centralization



Medical and industrial command centers



Military and government operations



Broadcast and production control rooms

HOW IT WORKS

Flexible KVM extension and switching

The P2P-KHR300 can operate in multiple modes depending on your application needs:



Direct Mode

Simple point-to-point extension without configuration

Supports: 1 Transmitter / 1 Receiver



Matrix Mode

OSD-based multi-user KVM switching across a network

Supports: Up to 64 Transmitters / 8 Receivers




SaviGate Mode

Centralized management, access control, and advanced routing when integrated with a SaviGate controller

Supports: Up to 128 Transmitters / 16 Receivers

Modes are easily changed using a simple dropdown menu within the web browser interface of each unit.

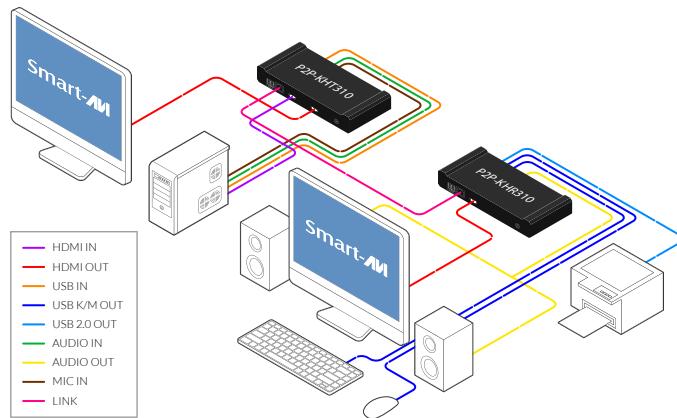

COMPATIBLE TRANSMITTERS

Pairs with the following receiver models for point-to-point operation:

- **P2P-KVT300** - DVI Transmitter via CATx & Fiber
- **P2P-KHT300** - HDMI Transmitter via CATx & Fiber
- **P2P-KHT310** - HDMI Transmitter via CATx & Fiber
- **P2P-KDT300** - DisplayPort Transmitter via CATx & Fiber

SPECIFICATIONS

Video OUT		USB	
Format	HDMI 1.4 & HDCP 1.4 Compliant, Video Bandwidth Up To 10.2 Gbps	Out	4x USB Type A Ports, USB 2.0, USB 1.1, USB 1.0 compatible
Video Resolution	Up To 4K @ 30 Hz	KM	Keyboard & Mouse Emulation
Connector	1x HDMI (19-Pin Female)	Other	
System			Power
Interface	EDID Storage & Emulation		12v DC, 3A (Power Supply Included)
Transmission Distance	CAT5: Up To 100m; LC Connector Fiber Multimode: Up to 500m; Fiber Single Mode: Up to 10km		
Compression	Ultra-Low Latency JPEG2000		Reliability (MTBF)
RS-232	Optional Pass-through up to 115200		135,540 Hours (MIL-HDBK-217F (N2) Parts Count Prediction Calculator)
Management	Selectable Direct, Matrix, SaviGate Gateway support for centralized management (sold separately)		Environmental Operating Temperature
Audio			0°C to 45°C (32°F to 113°F)
Format	PCM 2.0/2.1/5.1/7.1, Dolby Digital 5.1 ch, Dolby Digital Plus, Dolby TrueHD, DTS 5.1 ch		Environmental Operating Humidity
In/Output Interface	3.5 mm Stereo Aux Socket (Female)		10% to 90%, non-condensing
			ESD Protection
			Protection per IEC 61000-4-2 Standard at ±30kV Air and ±30kV Contact
			Support Warranty
			1-Year
			Certification
			CE, FCC, RCM, UL
			Dimensions
			9.5"W x 5.25"D x 1.70"H
			Weight
			1.41lbs and 0.63kg

ORDERING DETAILS

P2P-KHR310-S	Point-to-point Single-Head HDMI CAT5 & Fiber Receiver with USB 2.0, Audio and RS232. [P2P-KHR310, PS12VD3A]
--------------	---