



SmartCommander Hub

SmartCommander Switch

Remote Switch Control System

Control RS-232 Compliant Switches Remotely

The SmartCommander system brings the control of a matrix switch to remote workstations, eliminating the need to control the switch locally. Each workstation is equipped with a simple switch panel, allowing the user to select the desired output with the press of a button. The system also allows for a master to control the switching functions, overriding the remote control if necessary. The SmartCommander system can be used with any of SmartAVI's RS-232 compliant matrix switches.


FEATURES

- Control any SmartAVI RS-232 Compliant Matrix Switch
- Local Master Control to Override Remotes
- Compatible With all Major KVM Switches
- Supports Mac, PC, and Linux DVI
- Rack Mountable Solution
- Plug-and-play



SPECIFICATIONS

APPLICATION DIAGRAM

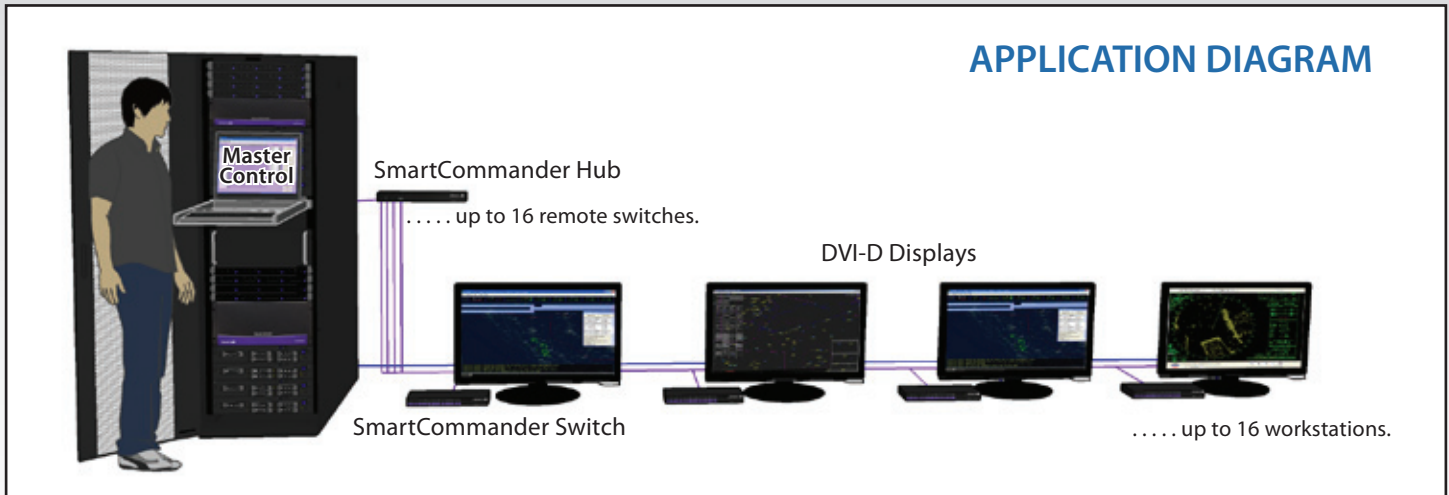

SmartCommander Hub-16 Rear



SmartCommander Switch-16 Rear

SmartCommander Hub

RS-232	Data up to 115,000bps
Power	External 5VDC4A
Dimensions	17 in W x 1.7 in H x 6 in D
Weight	4 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

SmartCommander Switch

Power	External 5VDC2A
Dimensions	17 in W x 1.7 in H x 3.375 in D
Weight	3 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

ORDERING INFORMATION

Part No.	Description
HUB-DVRS	Interface Hub between DVR16x16 Router and Button Control Panels. Includes: [HUB-DVR & PS5VD4A-WLLMT]
DVR-CPANEL	Button Control Panel for the DVR16X16 DVI Router

Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Clients of SmartAVI include:



SmartAVI, Inc. / Twitter: smartavi - 11651 Vanowen St. North Hollywood, CA 91605
 Tel: (818) 503-6200 Fax: (818) 503-6208 - <http://www.SmartAVI.com>

Smart-AVI
 SMART AUDIO VIDEO INNOVATION

Made in the USA

www.smartavi.com