



P2P-KVT302

Point-to-Point Dual-Head DVI-D CAT5 & Fiber Transmitter with USB 2.0 and Audio

P2PKVM Series High-Performance KVM-over-IP Extender & Matrix Solution Designed for mission-critical environments, it delivers ultra-low latency, high-resolution video, and secure connectivity over IP networks, ensuring efficient system control and flexibility.

FEATURES



Selectable Direct, Matrix and SaviGate modes via web interface



Supports DVI-D Video up to 2K @ 60Hz



Transparent USB 2.0 extension for peripherals



SaviGate Gateway support for centralized management (sold separately)



Ultra-low latency JPEG2000 compression



Plug-and-play installation



Analog audio passthrough



EDID learning and management



Up to 100 m over CATx or up to 10 km over Fiber

IDEAL USE CASES



AV and IT extension for secure environments



Digital signage and workspace centralization



Medical and industrial command centers



Military and government operations



Broadcast and production control rooms

HOW IT WORKS

Flexible KVM extension and switching

The P2P-KHT310 can operate in multiple modes depending on your application needs:



Direct Mode

Simple point-to-point extension without configuration

Supports: 1 Transmitter / 1 Receiver



Matrix Mode

OSD-based multi-user KVM switching across a network

Supports: Up to 64 Transmitters / 8 Receivers




SaviGate Mode

Centralized management, access control, and advanced routing when integrated with a SaviGate controller

Supports: Up to 128 Transmitters / 16 Receivers

Modes are easily changed using a simple dropdown menu within the web browser interface of each unit.

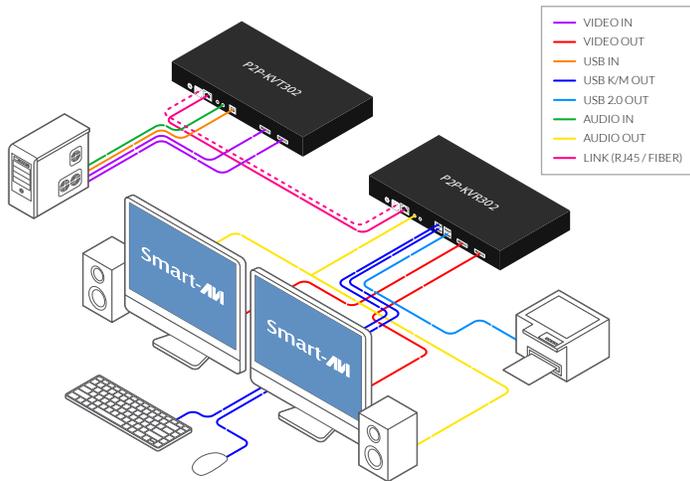

COMPATIBLE RECEIVERS

Pairs with the following receiver models for point-to-point operation:

- **P2P-KVR302** - DVI Receiver via CATx & Fiber
- **P2P-KHR302** - DVI-D Receiver via CATx & Fiber
- **P2P-KDR302** - DVI-D Receiver via CATx & Fiber

SPECIFICATIONS

Video OUT	
Format	DVI-D Dual-Link Compliant, Video Bandwidth up to 9.9 Gbps
Video Resolution	Up to 2560x1600 @ 60 Hz
Connector	(2) DVI-D (25-Pin female)

System	
Interface	EDID Storage & Emulation
Transmission Distance	Up to 100 m; LC Connector Fiber Multimode: Up to 500 m; Fiber Single Mode: Up to 10 km
Compression	Ultra-Low Latency JPEG2000
Management	Selectable Direct, Matrix, SaviGate Gateway support for centralized management (sold separately)

Audio	
Format	PCM 2.0/2.1/5.1/7.1, Dolby Digital 5.1 ch, Dolby Digital Plus, Dolby TrueHD, DTS 5.1 ch
In/Output Interface	3.5 mm Stereo Aux Socket (female)

USB	
Input Interface	(1) USB Type B, USB 2.0, USB 1.1, USB 1.0 compatible
KM	Keyboard & Mouse Emulation

Other	
Power	12 V DC, 3 A (Power Supply Included)
Reliability (MTBF)	135,540 Hours (MIL-HDBK-217F (N2) Parts Count Prediction Calculator)
Environmental Operating Temperature	0°C to 45°C (32°F to 113°F)
Environmental Operating Humidity	10% to 90%, non-condensing
ESD Protection	Protection per IEC 61000-4-2 Standard at ±30 kV Air and ±30 kV Contact
Support Warranty	1-Year
Certification	CE, FCC, RCM, UL
Dimensions	11.5"W x 5.25"D x 1.7"H
Weight	1.81 lbs 0.82 kg

ORDERING DETAILS

P2P-KVT302-S	Point-to-point Dual-Head DVI-D CAT5 & Fiber Transmitter with USB 2.0 and Audio. [P2P-KVT302, PS5VD3A]
--------------	-------------------------------------------------------------------------------------------------------